

Twoja Infrastruktura IT

netf.pl

NETF, specjalizujemy się w sprzedaży zaawansowanej infrastruktury IT. Znajdą tu Państwo szeroki asortyment produktów od czołowych światowych producentów sprzętu i oprogramowania IT, w tym H3C, Huawei, Cisco, Juniper, Fortinet, a także Dell, IBM, CommVault i ESET. Dzięki współpracy z tymi renomowanymi partnerami, NETF zapewnia swoim klientom dostęp do najnowocześniejszych rozwiązań technologicznych.

**Bezpieczeństwo,
Efektywność,
Optymalizacja**




XV2-2T0 Wi-Fi 6 Outdoor Access Point

802.11ax Dual-Radio, 2x2

XV2-2T0 Quick Look:

- Dual-radio 802.11ax
- 2.5 GbE uplink Ethernet
- 1 GbE with power out
- Outdoor IP67 rated, -40°C to 65°C
- High-efficiency omni antenna

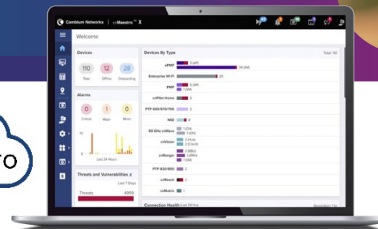

Outdoor Wi-Fi 6 Designed for Greater Range and Speed

The XV2-2T0 is a dual radio Wi-Fi 6 access point (AP) designed for outdoor deployments in Wi-Fi hotspots, outdoor enterprise networks, hospitality, and education markets. The XV2-2T0 features surge suppression up to 4kV and an LTE co-existence filter.

The XV2-2T0 delivers Cambium 30VDC power out, or 48VDC for PoE devices connected to the second gigabit Ethernet port. Ideal for connecting this AP to a Cambium Networks' subscriber module (SM), cnWave™ 60 GHz Connection Node, or any IP and Ethernet device, such as a security IP camera or another Wi-Fi access point.

The new IEEE 802.11ax standard delivers higher network speeds and enables more connected devices at higher packet quality. In outdoor deployments, the IEEE 802.11ax standard delivers greater range by boosting the RF frame preamble by 3dB and improved signal quality with increased guard interval vs previous Wi-Fi technology. The XV2-2T0 is fully backward compatible with existing Wi-Fi technology and prepares a network for higher growth and greater density of Wi-Fi-connected devices.

Cloud or On-premises Management

The XV2-2T0 is supported by Cambium Networks' ONE Network enterprise architecture managed by the cnMaestro™ Network Management System. cnMaestro uses a distributed intelligence architecture with cloud-first management and edge-intelligent Wi-Fi that self-optimizes for the RF environment. cnMaestro delivers a single-pane-of-glass management experience for enterprise Wi-Fi APs, cnMatrix™ Ethernet Switches, NSE Service Edge, residential service provider routers, Cambium's fixed wireless access solutions, and Cambium Fiber.

XV2-2T0 Wi-Fi 6 Outdoor Access Point

Specifications

Radios	5 GHz 802.11 a/n/ac/ax, 2x2 2.4 GHz 802.11 b/g/n/ax, 2x2 BLE 4.1	Power	Max power 20W, 802.3at powered device Up to 50W when powering an auxiliary device
Wi-Fi	802.11 a/b/g/n/ac/ax	Dimensions	582 mm x 200 mm x 80 mm (22.91 in x 7.87 in x 3.15 in)
SSID Security	WPA3-SAE, WPA3-Enterprise, WPA2-PSK (CCMP, AES, 802.11i), WPA2 Enterprise (802.1x/EAP), OSEN, OWE, Open	Weight	2,700 g (5.95 lb)
Ports	1 x IEEE 100/1000/2500 Mbps 1 x IEEE 10/100/1000 Mbps Ethernet with SW configurable passive PoE output of 30V or 48V up to 30 watts	Security	Kensington lock slot
Antenna Gain	5 GHz 9.3 dBi, omni 2.4 GHz 5.3 dBi, omni	Mount Options	Pole or wall mounting Pole diameter: Min 30 mm/max 75 mm
Max EIRP*	5 GHz 36 dBm 2.4 GHz 33 dBm	Ambient Operation Temperature	40°C to 65°C (-40°F to 149°F)
Filter LTE Band	38, 40	Storage Temperature	-40°C to 70°C (-40°F to 158°F)
FCC Ch 1–11, 36–48, 52–64, 100–144, 149–165		Humidity	95% RH non-condensing
ISED Ch 1–11, 36–48, 52–64, 100–116, 149–165		MTBF	669,174 hours at 25°C 206,739 hours at 65°C
ETSI* Ch 1–13, 36–64, 52–64, 100–140, 149–173		LEDs	Multi-color status LEDs, dimmable, on/off
ROW* Ch 1–14, 36–48, 52–64, 100–144, 149–177		Certifications (compliance)	Wi-Fi Alliance 802.11 a/b/g/n/ac/ax, FCC, IC, CE, EN 60601-1-2, EN 60950-1, IEC 62368-1 Safety, EN 60601-1-2 Medical, EN 61000-4-2/3/5 Immunity, EN 50121-1 Railway EMC, EN 50121-4 Railway Immunity, IEC 61373 Railway Shock & Vibration, EN 62311 Human Safety/RF Exposure, WEEE & RoHS

*Individual country limits may apply.

Standards

Wi-Fi Protocols	VHT MCS rates, 16/64/256/1024-QAM, channel width support in 5 GHz: 20/40/80 MHz
	TWT, Long OFDM Symbol, transmit beamforming, Airtime Fairness, AMSDU, AMPDU, RIFS, STBC, LDPC, MIMO Power Save, MRC, BPSK, QPSK, CCK, DSSS, OFDM, OFDMA, UL/DL MU-MIMO
	IEEE 802.11 a/ac/ax/b/d/e/g/h/i/k/n/r/u/v/w

XV2-2T0 Wi-Fi 6 Access Point

Network Specifications

Operational Modes	Controllerless standalone Cloud-managed cnMaestro, VM	RF Management	Multi-modal RF optimization supporting Auto-RF for dynamic channel selection and dynamic power adjustment configured via cnMaestro, performed in the intelligent edge AP RF monitor with channel utilization/packet error rate/interference.
WLAN	1,024 concurrent clients per AP 16 SSID per AP	Band Steering	Yes
Security, Authentication Encryption	Open, WPA2-AES with PSK, ePSK and Enterprise WPA3 with PSK (WPA3-SAE), ePSK, Enterprise, Enterprise-CNSA, OWE (Enhanced Open) OSEN and PMF (802.11 W) MAC authentication with local database or external database using RADIUS protocol 802.1X with EAP-TTLS, EAP-TLS/MSCHAPv2, PEAPv0/PEAPv1/EAP-PEAP/EAP-SIM/AKA/FAST Hotspot WEB authentication	Mesh	Multi-hop, either band
Wi-Fi Quality of Service	WMM (packet marking either with 802.1p or IP DSCP), WMM-PS, U-APSD Multicast to unicast conversion	Scheduled WLAN	On/off by day, week, time of day
Service Availability	Critical network resource monitor with SSID shutdown	Data Limit	Client bitrate/time/throughput limit per SSID
Fast Roaming	802.11k/r/v, OKC, cnMaestro-assisted roam	Network	LACP (802.3ad), TCP connection log, NAT logging firewall, DHCP server, DHCP Relay option 82, VLAN pooling, RADIUS attribute, VID VLAN per SSID per user, ePSK with VLAN assignment per PSK LLDP, IGMP v1, v2
Guest Access/ Captive Portal Service (EasyPass)*	cnMaestro-hosted EasyPass portal Multiple authentication methods supported to onboard guest user: <ul style="list-style-type: none"> • Radius-based authentication • Click-through with simple terms and conditions acceptance • Social login using Google®, Facebook® • SMS-based authentication (X) • Voucher-based access • Microsoft® Azure AD and Google Workspace® (X) • Sponsored guest access (X) • Self-registration access (X) cnMaestro API support for external captive portal integration 802.11u, Hotspot 2.0	Network Tools	Wired and wireless remote packet capture, logging, WAN speed test, ZapD, remote network connectivity tools
Accounting	RADIUS accounting, multiple AAA, CoA, DM	Tunnel	L2TPv2, L2GRE, PPPoE
API	RESTful management and statistics API via cnMaestro X, presence location push APIs	IP	IPv4, IPv6
		VLAN	802.11Q, max 4096
		Management Interfaces Security	HTTP/HTTPS web interface, SSH, Telnet Rogue AP detection and termination (X), WIDs/WIPs, DoS protection L2–L7 firewall with application visibility (X) and control (X), DNS-based access control (X) ACL and AirCleaner tools
		Services	Wi-Fi Calling control, NTP, Syslog, DNS proxy, SNMP traps, SNMPv1, SNMPv2c, SNMPv3, TCP and DNS logging

*X features available in cnMaestro X.

XV2-2T0 Wi-Fi 6 Access Point

Management



cnMaestro uses a distributed intelligence architecture with cloud-first management and edge-intelligent APs that self-optimize for the RF environment. cnMaestro delivers a single pane-of-glass management for Cambium broadband fixed wireless, cnMatrix Ethernet Switches, enterprise-grade Wi-Fi APs, NSE Service Edge, and residential service provider routers.

cnMaestro can be deployed on cloud or on-premises via a virtual machine.

To serve a growing market for advanced management and services functionality, Cambium Networks offers cnMaestro in two management tiers:

cnMaestro X

Paid subscription that includes:

- Advanced device management capabilities
- Deep packet inspection (DPI) application visibility and Control for 2,400+ apps
- RESTful management and statistics API
- Presence location push APIs
- Graphic reports
- Webhooks
- Cambium Care Pro for 24x7 technical support
- Accelerated access to L2 engineers and regular software updates

Assists

- Assesses the network's configuration and identifies weak security settings and proposes a fix to ensure the network configuration is up to the top security industry standards

cnMaestro Essentials

License-free cloud management that delivers a disruptive total cost of ownership (TCO) for organizations of all sizes. Includes EasyPass for OneClick or voucher-based connection as well as WiFi4EU access.

X Assurance

- Helps to quickly identify network-wide connectivity issues by isolating every element of the client's lifecycle, either radio or network related
- Gives an overview quality index of the network and highlights each element's contribution to easily identify the worst offender
- Provides insight of probable causes and proposes fixes for the administrator to apply
- Provides individual client connectivity visibility throughout the entire lifecycle of its connection to easily identify each connection's result and highlight the failure reason, should there be any

EasyPass Portal with Additional Options

- Self-registration: Form-based access
- Sponsored guest: Guest ambassador-based access
- Paid access: Monetize the Wi-Fi access
- Microsoft Azure: Corporate user login
- Google Login: Web login using Google accounts

**Find out more about
cnMaestro**

XV2-2T0 Wi-Fi 6 Access Point



Front



Back Panel



Bottom




Side



Front Oblique

XV2-2T0 Wi-Fi 6 Access Point

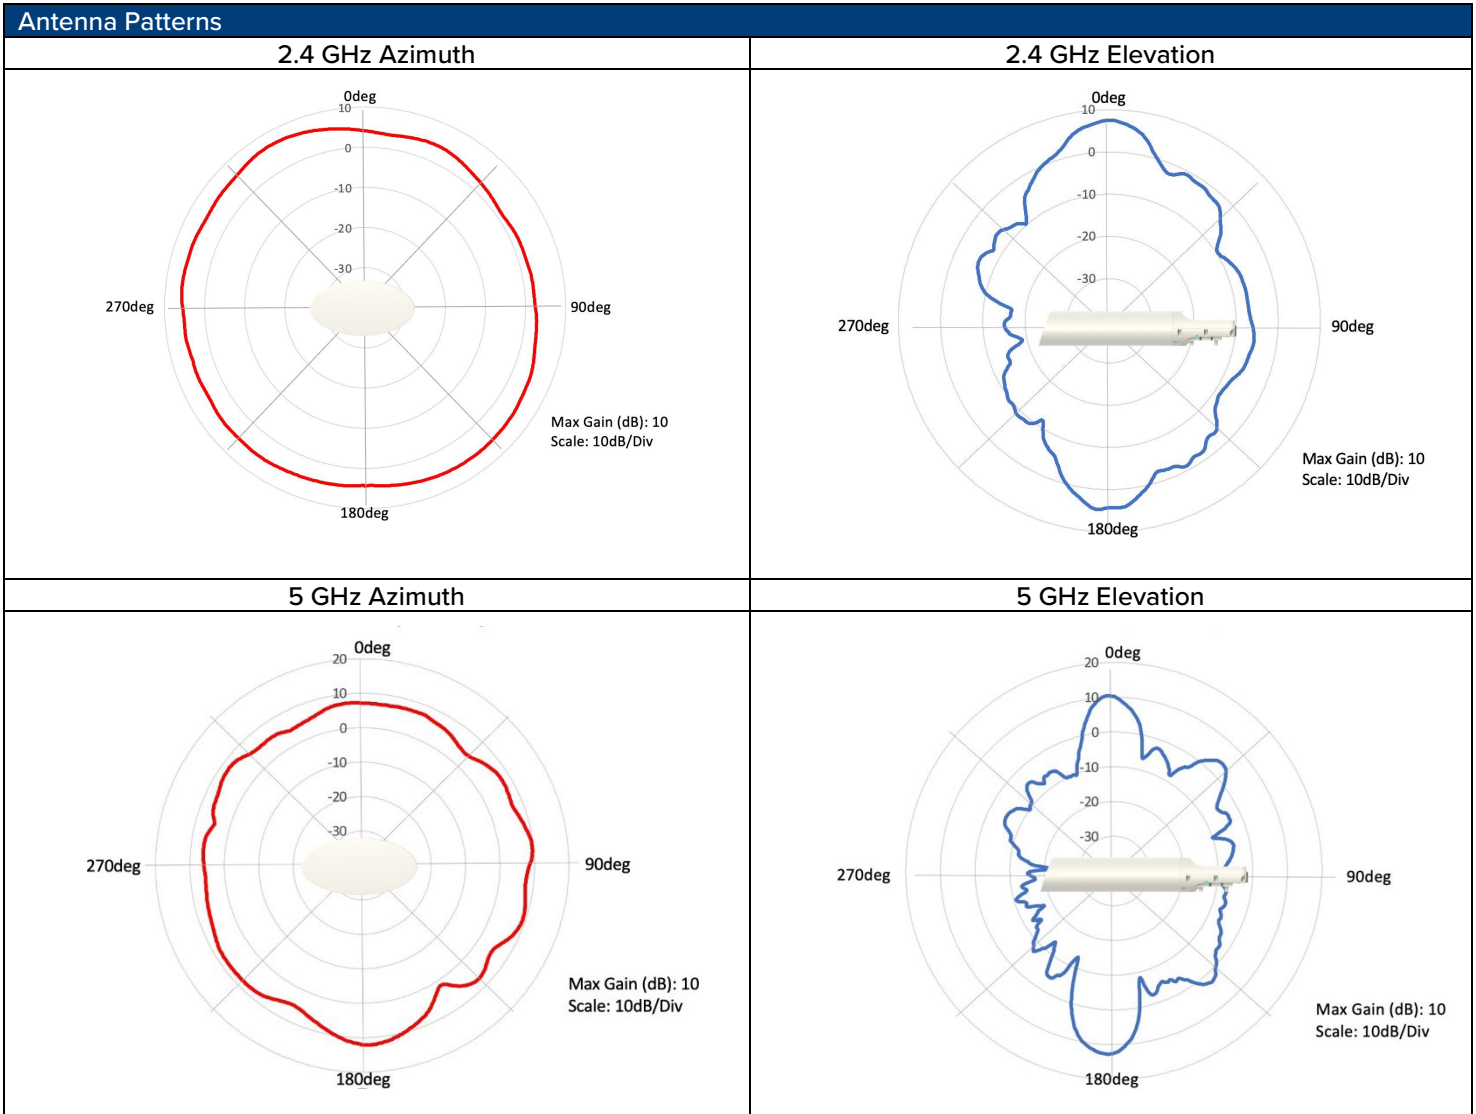

XV2-2T0 Wi-Fi 6 Access Point

XV2-2T0 Ordering Information

Regulatory Model	REG-XV2-2T0
XV2-2T0XA00-US	XV2-2T0 Dual-Radio Wi-Fi 6. Outdoor (FCC) 802.11ax 2x2, Omni, US
XV2-2T0XA00-CA	XV2-2T0 Dual-Radio Wi-Fi 6. Outdoor (IC) 802.11ax 2x2, Omni, CA
XV2-2T0XA00-EU	XV2-2T0 Dual-Radio Wi-Fi 6. Outdoor (ETSI) 802.11ax 2x2, Omni, EU
XV2-2T0XA00-RW	XV2-2T0 Dual-Radio Wi-Fi 6. Outdoor 802.11ax 2x2, Omni, RW
C000000L141A	PoE, 60W, 56V, 10GbE DC Injector, Indoor, Energy Level 6 Supply, accepts C5 connector
N000000L034B	PoE injector, 30.5W, 56V, 5GbE DC Injector, Indoor, Energy Level 6 Supply, accepts C5 connector
N000900L031A	AC line cord, US Type B, 720mm, C5 connector
N000900L032A	AC line cord, EU Type F angled, 720mm, C5 connector
N000900L033A	AC line cord, UK Type G angled, 720mm, C5 connector
N000900L034A	AC line cord, BR Type N, 720mm, C5 connector
N000900L011A	AC line cord, AU Type I, 720mm, C5 connector
N000900L012A	AC line cord, IN Type D angled, 720mm, C5 connector
N000900L013A	AC line cord, AR Type I, 720mm, C5 connector
N000900L015A	AC line cord, CN Type I, 720mm, C5 connector
N000900L048A	AC line cord, ZA Type M angled, 720mm, C5 connector

cnMaestro X Subscriptions

MSX-SUB-XV2-2T0-1	cnMaestro X 1-year subscription for one XV2-2T0 AP. Creates one Device Tier3 slot. Includes Cambium Care Pro support. Order CCADV-UPG-XV2-2T0-1 for NBD advanced replacement hardware support.
MSX-SUB-XV2-2T0-3	cnMaestro X 3-year subscription for one XV2-2T0 AP. Creates one Device Tier3 slot. Includes Cambium Care Pro support. Order CCADV-UPG-XV2-2T0-3 for NBD advanced replacement hardware support.
MSX-SUB-XV2-2T0-5	cnMaestro X 5-year subscription for one XV2-2T0 AP. Creates one Device Tier3 slot. Includes Cambium Care Pro support. Order CCADV-UPG-XV2-2T0-5 for NBD advanced replacement hardware support.

Cambium Care Support

CCADV-SUP-XV2-2T-1	Cambium Care Advanced, 1-year support for one XV2-2T0 Wi-Fi 6 AP. 24x7 TAC support, SW updates, and NBD advance replacement for HW
CCADV-SUP-XV2-2T-3	Cambium Care Advanced, 3-year support for one XV2-2T0 Wi-Fi 6 AP. 24x7 TAC support, SW updates, and NBD advance replacement for HW
CCADV-SUP-XV2-2T-5	Cambium Care Advanced, 5-year support for one XV2-2T0 Wi-Fi 6 AP. 24x7 TAC support, SW updates, and NBD advance replacement for HW
CCADV-UPG-XV2-2T-1	Cambium Care Advanced Add-on to cnMaestro X, 1-year support for one XV2-2T. 24x7 TAC support, SW updates, and NBDS advance replacement for HW
CCADV-UPG-XV2-2T-3	Cambium Care Advanced Add-on to cnMaestro X, 3-year support for one XV2-2T. 24x7 TAC support, SW updates, and NBDS advance replacement for HW
CCADV-UPG-XV2-2T-5	Cambium Care Advanced Add-on to cnMaestro X, 5-year support for one XV2-2T. 24x7 TAC support, SW updates, and NBDS advance replacement for HW
CCPRO-SUP-XV2-2T-1	Cambium Care Pro, 1-year support for one XV2-2T0 Wi-Fi 6 AP. 24x7 TAC support and SW updates
CCPRO-SUP-XV2-2T-3	Cambium Care Pro, 3-year support for one XV2-2T0 Wi-Fi 6 AP. 24x7 TAC support and SW updates
CCPRO-SUP-XV2-2T-5	Cambium Care Pro, 5-year support for one XV2-2T0 Wi-Fi 6 AP. 24x7 TAC support and SW updates

XV2-2T0 Wi-Fi 6 Access Point

LIMITED WARRANTY

Cambium Networks XV2-2T0 Wi-Fi 6 Access Point includes a 3-year hardware warranty.

ABOUT CAMBIUM NETWORKS

Cambium Networks enables service providers, enterprises, industrial organizations, and governments to deliver exceptional digital experiences and device connectivity with compelling economics. Our ONE Network platform simplifies management of Cambium Networks' wired and wireless broadband and network edge technologies. Our customers can focus more resources on managing their business rather than the network. We make connectivity that just works.

cambiumnetworks.com

10212024