


Twoja Infrastruktura IT netf.pl

NETF, specjalizujemy się w sprzedaży zaawansowanej infrastruktury IT. Znajdą tu Państwo szeroki asortyment produktów od czołowych światowych producentów sprzętu i oprogramowania IT, w tym H3C, Huawei, Cisco, Juniper, Fortinet, a także Dell, IBM, CommVault i ESET. Dzięki współpracy z tymi renomowanymi partnerami, NETF zapewnia swoim klientom dostęp do najnowocześniejszych rozwiązań technologicznych.

**Bezpieczeństwo,
Efektywność,
Optymalizacja**



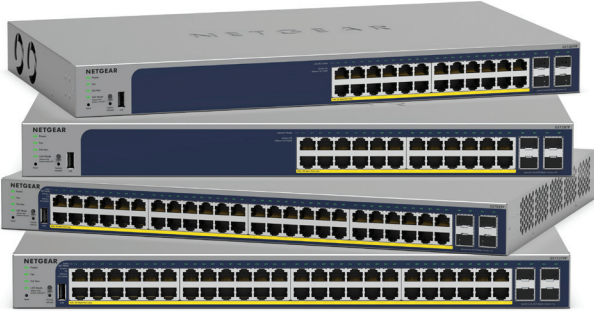

All ports PoE+ with up to 760W PoE budget and Remote/Cloud Management option - Select your new network engine!

As a leading provider of network equipment for SMBs, NETGEAR® understands the importance of providing a great choice of PoE port counts and power budgets that can adapt to your business' needs, whether in the hospitality, catering, education or retail domains.

The GS728TP, GS728TPP, GS752TP and GS752TPP Gigabit Ethernet Switches with PoE+ and 4 SFP Ports join the NETGEAR standalone Smart switches family, adding full 24 and 48 port PoE+ support for

deployment of modern high-power PoE devices. Cautious spender organizations can now deploy denser PoE+ devices connected to a cost-effective switch, with a reasonable PoE power budget of 190W over 24-port, or 380W over 48-port. Organizations who buy infrastructure for the long term and want future proofing for the unforeseeable can now select a switch with a PoE power budget of 380W over 24-port, or 760W over 48-port providing more headroom.

Temperature- and load-based fan-speed control combines accurate monitoring with minimized system acoustic noise: the GS728TP supports quiet rack mounting operation with a maximum of 26.80dBA even at full PoE power with traffic on all ports and 25°C (77°F) ambient. Following the same measurements, the GS728TPP is rated at 33.30dBA, the GS752TP at 36.60dB and the GS752TPP at 39.30dBA.

Highlights

The NETGEAR PoE+ Gigabit Smart switches with Remote/Cloud Management provides a great value, with configurable L2 network features like VLANs and PoE operation scheduling, allowing SMB customers to deploy PoE-based VoIP phones, IP cameras, video-over-IP endpoints and Wireless access points simply and securely. Advanced features such as IPv4/IPv6 Layer 3 static routing, LACP link aggregation, DiffServ QoS, Private VLANs, Multicast VLAN Registration and Spanning Tree will satisfy even the most advanced small business networks.

Key features include:

- Quiet rack mounting operation with 26.80 to 39.30dBA at 25°C (77°F) ambient
- Layer 3 static routing with 32 routes (IPv4 and IPv6) for interVLAN local routing
- Advanced VLAN and Private VLAN support for better network segmentation
- L2/L3/L4 access control lists (ACLs) for granular network access control including 802.1x port authentication
- Advanced per port PoE controls for remote power management of PoE connected devices including operation scheduling (e.g. Wireless APs, IP security cameras, LED lighting, secure access door locks, IoT devices...)
- Advanced QoS (Quality of Service) for traffic prioritization including port-based, 802.1p and L2/L3/L4 DSCP-based
- Auto "denial-of-service" (DoS) prevention
- IGMP Snooping and Querier for multicast optimization

Gigabit PoE+ Smart Switches with Remote/Cloud Management

- Multicast VLAN Registration (MVR) for larger L2 multicast networks and AV over IP deployment
- Dynamic ARP for increased security targeting a class of Man in the Middle attack
- Rate limiting and priority queuing for better bandwidth allocation
- Port mirroring for network monitoring
- Energy Efficient Ethernet (IEEE 802.3az) for maximum power savings
- Cable test to troubleshoot connection issues
- SNMP v1, v2c, v3 and RMON remote monitoring

Build a future-proof network with NETGEAR:

- Solid performance with non-blocking architecture, 16K MAC addresses, 256 VLANs, 100 shared (ingress) ACLs and 512 Multicast groups

- Comprehensive IPv6 supporting management, QoS, ACL and routing, ensuring investment protection and a smooth migration to IPv6-based network
- PoE+ support on all models and on all ports
- 4 Dedicated SFPs, not only providing fiber uplinks, but also uplink redundancy and failover, improving reliability and availability for the network

Fully-integrated cloud-manageable devices

- Remote/Cloud Management capability with NETGEAR Insight. Instantly activate NETGEAR Insight Cloud management from the web GUI, for simpler configuration and deployment from anywhere using the NETGEAR Insight app on mobile devices or the Insight Cloud portal through a web browser

Smart IT, not Big IT

- Easy-to-use Web browser-based management GUI
- Network Management System (NMS300), allowing all NETGEAR business products to be deployed and managed through this single interface
- Dual firmware images improve reliability and uptime to your network
- Text-based Lite Command-line Interface (CLI)

NETGEAR quality and reliability

- Worry-free NETGEAR Limited Lifetime Warranty*, online technical chat support and Next Business Day (NBD) replacement
- 90-days Free 24x7 Advanced Technical Phone Support**



Hardware at a Glance

	FRONT				REAR	SIDE
Model Name	Form-Factor	10/100/1000 Base-T RJ45 ports	1000BASE-X Fiber SFP Ports	PoE+ 802.3at Ports (Budget)	Power Supply	Fans
GS728TP	Rack mount	24	4	24 PoE+ (190W)	1 internal PSU, fixed	2 internal fans, fixed
GS728TPP	Rack mount	24	4	24 PoE+ (380W)	1 internal PSU, fixed	2 internal fans, fixed
GS752TP	Rack mount	48	4	48 PoE+ (380W)	1 internal PSU, fixed	2 internal fans, fixed
GS752TPP	Rack mount	48	4	48 PoE+ (760W)	1 internal PSU, fixed	3 internal fans, fixed

Software at a Glance

LAYER 2+ / LAYER 3 LITE FEATURES							
Management	IPv4/IPv6 ACL and QoS	IPv4/IPv6 Multicast Filtering	Auto-VoIP Auto-Video	IEEE (802.3az) Energy Efficient Ethernet	VLANs	Convergence	IPv4 & IPv6 Static Routing
Web browser-based GUI (HTTP/HTTPS), NETGEAR Insight mobile app or Insight Cloud Portal for local or remote management Text-based Lite Command-line Interface (CLI) RMON, SNMP	L2, L3, L4, ingress	IGMP and MLD Snooping	Yes	Yes	Static, Dynamic, Voice, MAC, Protocol-based, and Private VLAN	LLDP-MED, RADIUS, 802.1X	Yes

Performance at a Glance

Model Name	Packet buffer	CPU	ACLs	MAC Address Table ARP Table VLANs	Fabric	Latency (Max Connection Speed)	Static Routes (IPv4 & IPv6)	Multicast IGMP Group
GS728TP	1.5MB	800MHz ARM A55 Single Core	100 shared	16K MAC 512 ARP 256 VLANs	56Gbps line-rate	1G Copper: <3.35µs 1G Fiber: <2.5µs	IPv4: 32 IPv6: 32	512
GS728TPP								
GS752TP		512MB DDR RAM			104Gbps line-rate			
GS752TPP		64MB FLASH						

Features and Benefits

Hardware Features	
1000BASE-T Copper Ethernet PoE+ connections	Support high-density VoIP, Surveillance and Wi-Fi AP deployments, scalable for future growth. Never face the risk of running out of PoE ports.
1000BASE-X Fiber SFP ports	Four dedicated Gigabit SFP ports for aggregation to the network core. Support for Fiber and Copper modules. Can also build dual redundancy by a trunked uplink with link aggregation and failover.
Great choice of PoE port counts and PoE power budgets that can adapt to the business's needs	190W, 380W or 760W PoE budget available across 24 or 48 Gigabit PoE+ ports (802.3at) – Connect multiple power demanding devices to your network with a single wire for power and connectivity.
Low Acoustics	Temperature-based fan-speed control minimizes system acoustic noise in any environment starting at 26.80dBA at 25°C (77°F) ambient.
Energy Efficient Ethernet (IEEE 802.3az)	Maximum power reduction for ongoing operational cost savings.
Software Features	
Fully-integrated Cloud-manageable Devices	Require no additional hardware (cloud keys, network portals, local servers, VPN or proxy appliances etc) to directly connect to the cloud and allow remote management. No additional hardware or software. Just switch to Insight Cloud management mode through Web browser-based user interface and go.
Text-based Lite Command-line Interface (CLI)	Provide a text-based way to manage and monitor the system. The CLI can be accessed by using a direct serial connection, or by using a remote logical connection with telnet or SSH.
Comprehensive IPv6 Support for Management, ACL and QoS	Build current network with future in mind. Ensure investment protection and a smooth migration to an IPv6-based network without switch replacement.
IPv4 & IPv6 Static Routing	A simple way to provide segmentation of the network with internal routing through the switch – reserving the router for external traffic routing only, making the entire network more efficient.
Robust security features: <ul style="list-style-type: none"> • 802.1x authentication (EAP) • Port-based security by locked MAC • ACL filtering to permit or deny traffic based on MAC and IP addresses 	Build a secured, converged network with all types of traffic by preventing external attacks and blocking malware while allowing secure access for authorized users.
Comprehensive QoS features: <ul style="list-style-type: none"> • Port-based or 802.1p-based prioritization • Layer 3-based (DSCP) prioritization • Port-based ingress and egress rate limiting 	Advanced controls for optimized network performance and better delivery of mission-critical traffic such as voice and video.
Auto-VoIP, Auto-Voice VLAN, and Auto-Video VLAN	Automatic Voice over IP prioritization (Auto-VoIP) simplifies most complex multi-vendor IP telephone deployments either based on protocols (SIP) or on OUI bytes (default database and user-based OUIs) in the phone source MAC address, providing the best class of service to VoIP streams (both data and signaling) over other ordinary traffic by classifying traffic, and enabling correct egress queue configuration. Similarly, Auto-video VLAN enables IGMP snooping to minimize broadcast streams.

Software Features (continued)

IGMP (IPv4) and MLD (IPv6) Snooping and Querier modes with Fast Leave

Facilitate fast receiver joins and leaves for multicast streams. Save cost and improve network efficiency by ensuring multicast traffic only reaches designated receivers without the need of an extra multicast router.

Protected Ports

Ensure no exchange of unicast, broadcast, or multicast traffic between the protected ports on the switch, thereby improving the security of your converged network. This allows your sensitive phone conversations to stay private and your surveillance video clips can be forwarded to their designated storage device without leakage or alteration.

DHCP Snooping and Dynamic ARP Inspection

Ensure IP address allocation integrity by only allowing DHCP messages from trusted DHCP servers and dropping malformed DHCP messages with a port or MAC address mismatch. Use the DHCP snooping bindings database per port and per VLAN to drop incoming packets that do not match any binding and to enforce source IP/MAC addresses for malicious users traffic elimination.

Dynamic VLAN Assignment (RADIUS)

IP phones and PCs can authenticate on the same port but under different VLAN assignment policies. Users are free to move around and enjoy the same level of network access regardless of their physical location on the network.

Dual Firmware Images

Dual firmware images for transparent firmware updates with minimum service interruption.

Firmware Updates from Cloud

Direct cloud-to-device firmware updates, initiated and/or scheduled using the Insight app, all from the palm of your hand, anytime, anywhere.

Simply activate NETGEAR Insight Cloud management to manage your network. Anytime. Anywhere.

By activating the NETGEAR Insight Cloud management, the users will enable fundamental management features allowing businesses simpler configuration and deployment from anywhere using the NETGEAR Insight app from mobile devices or the Insight Cloud portal from any device with a web browser.

Unique advanced management features of these Insight Managed devices include:


- Remote monitoring and management with performance dashboards and troubleshooting features including remote reboot, port and PoE advanced configuration including remote enable/disable/power-cycle, PoE scheduling, and firmware updates with auto-schedule mode
- Single pane-of-glass multi-device, multi-network, and multi-site remote monitoring and notifications with the NETGEAR Insight app
- Full-fledged local or remote access for configuration, management, and monitoring on a larger display using your tablet, laptop, or desktop computer through the NETGEAR Insight Cloud portal
- Configurable in-app and email alerts and notifications
- Auto-join and configure (zero-touch provisioning) for additional Insight Managed devices added to the network
- Centralized network configuration (policies) across Insight Managed switches, and access points for VLANs, ACLs, QoS, LAGs, etc.
- Cloud-based network administration, monitoring, and firmware management

For more information about NETGEAR Insight-manageable device settings, please see at:

<https://www.netgear.com/support/product/Insight.aspx>

Target Application

Network Convergence

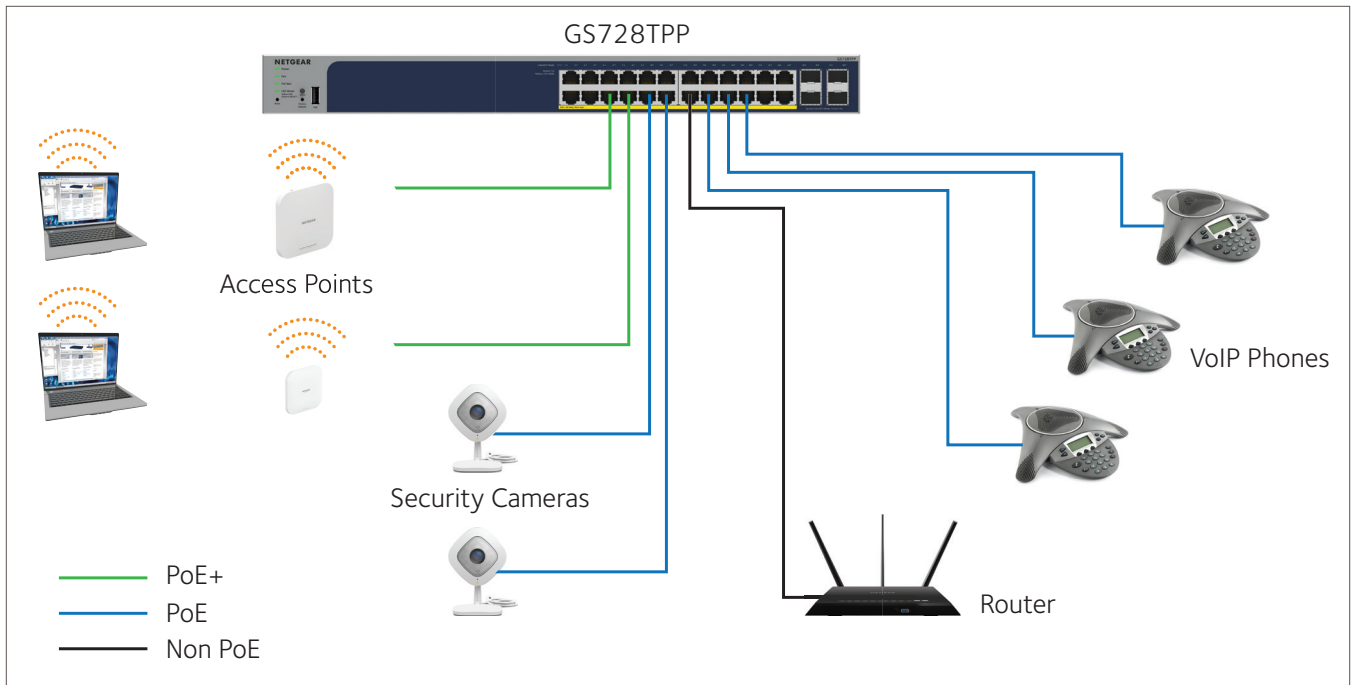

Within small and medium-sized organizations – especially in the hospitality, catering, education, and retail industries – there is growing deployment of VoIP phones, IP security cameras, video-over-IP endpoints, proximity sensors, LED lighting, secure access door locks, and other IoT devices. The dense proximity of these devices requires network switches capable of supporting PoE so a network manager can add power-hungry devices to the network with a single wire for power and connectivity. Wave 2 802.11ac wireless access points and pan-tilt-zoom HD surveillance cameras with features such as night vision and built-in motion tracking also require PoE+ power (802.3at), increasing the power demands on PoE switches.

The new 24-port and 48-port NETGEAR Smart switches support dense deployments of these modern high-power PoE+ devices. They offer powerful Layer 2 and Lite Layer 3 (static routing) features for IPv4 and IPv6 with enhanced performance and a focus on usability within SMB environments:

- 190W (GS728TP) or 380W (GS728TPP) PoE budget across 24 Gigabit PoE+ ports
- 380W (GS752TP) or 760W (GS752TPP) PoE budget across 48 Gigabit PoE+ ports
- 4 dedicated Gigabit SFP fiber ports for aggregation to the network core
- Quiet rack mounting operation with 26.80dBA to 39.30dBA max at 25°C (77°F) ambient
- Layer 3 static routing with 32 routes (IPv4 and IPv6) for interVLAN local routing
- IGMP Snooping, IGMP Querier and IGMP Fast Leave for multicast optimization
- Include VLANs, Private VLAN, PoE scheduling, ACLs, DiffServ, LACP, MVR and STP
- Easy-to-use Web browser-based management GUI – No need for an IT expert
- Limited Lifetime* Warranty, Next Business Day replacement, Tech support

Gigabit PoE+ Smart Switches
with Remote/Cloud Management

Technical Specifications	GS728TPv3	GS728TPv3	GS752TPv3	GS752TPv3
10M/100M/1G RJ-45 copper ports	24	24	48	48
PoE / PoE+ ports	24 PoE+ (190W PoE budget)	24 PoE+ (380W PoE budget)	48 PoE+ (380W PoE budget)	48 PoE+ (760W PoE budget)
1G SFP (fiber) ports	4 (dedicated)	4 (dedicated)	4 (dedicated)	4 (dedicated)
USB port (for config file upload/backup & firmware updates)	Yes	Yes	Yes	Yes
Unified Network Management (Discovery, Setup, Monitoring, And Management)				
Discovery, setup, monitoring and management	NETGEAR Insight mobile app on phone or tablet; Insight Cloud portal from PC, Mac, or tablet web browser			
Remote/Cloud management	Anywhere, anytime, from the palm of your hand using Insight mobile app or from any PC, Mac, or tablet web browser using the Insight Cloud portal			
Centralized network configuration (policies)	Centralized network configuration (policies) across Insight Managed switches, and wireless access points for VLANs, ACLs, QoS, and LAGs			
Device auto-join and configure (zero-touch provisioning)	Additional Insight Managed devices added to the network automatically inherit the network configuration			
Multi-site, multi-network single pane-of-glass view	Manage multiple sites, locations, and networks in a single view using the Insight mobile app or Insight Cloud Portal			
Multi-switch, multi-port concurrent configuration for ACLs, VLANs, QoS, PoE, etc	Apply settings and policies on multiple ports across multiple switches all at the same time using the Port Config Wizard			
Performance Specification				
CPU	800MHz ARM A55 Single Core			
Packet buffer memory (Dynamically shared across only used ports)	1.5 MB	1.5 MB	1.5 MB	1.5 MB
Forwarding modes	Store-and-forward			
Bandwidth	56 Gbps	56 Gbps	104 Gbps	104 Gbps
Priority queues	8			
Priority queuing	Weighted Round Robin (WRR)			
MAC address database size (48-bit MAC addresses)	16K			
Multicast groups	512			
Number of IPv4 static routes	32			
Number of IPv6 static routes	32			
Number of VLANs	256			
Number of ARP cache entries	512 ARP			
Number of DHCP snooping bindings	256			
Access Control Lists (ACLs)	100 shared for MAC, IP and IPv6 ACLs (ingress)			
Packet forwarding rate (64 byte packet size) (Mpps)	41.67	41.67	77.38	77.38
Jumbo frame support (bytes)	Up to 10K packet size			
Acoustic noise level @ 25°C (dBA) (ANSI-S10.12)	26.80dBA	33.30dBA	36.60dBA	39.30dBA

Performance Specification	GS728TPv3	GS728TPv3	GS752TPv3	GS752TPv3
Mean Time Between Failures (MTBF) @ 25°C	1,751,613 hours (200.0 yrs)	1,252,990 hours (143.0 yrs)	1,410,340 hours (160.9 yrs)	1,296,949 hours (148.0 yrs)
100M Copper Latency (64-byte; 1518-byte; 9216-byte frames)	8.376µs;8.655µs; 8.864µs	8.379µs;8.658µs; 8.871µs	8.110µs;8.470µs; 8.810µs	9.891µs;9.444µs; 9.617µs
1G Copper Latency (64-byte; 1518-byte; 9216-byte frames)	4.004µs;4.394µs; 4.691µs	4.008µs;4.398µs; 4.701µs	3.861µs;4.266µs; 4.417µs	3.910µs;4.319µs; 4.411µs
1G Fiber Latency (64-byte; 1518-byte; 9216-byte frames)	4.074µs;4.245µs; 4.551µs	4.075µs;4.254µs; 4.575µs	3.786µs;4.198µs; 4.214µs	3.841µs;4.119µs; 4.211µs
L2 Services - VLANs				
IEEE 802.1Q VLAN tagging			Yes	
IP-based VLANs			Yes	
MAC-based VLANs			Yes	
Auto-VoIP VLAN / Auto-Voice VLAN	Yes, based on OUI bytes (default database and user-based OUIs) in the phone source MAC address			
Auto-VoIP	Yes, based on protocols (SIP). Prioritizes traffic to a higher queue			
Voice VLAN	Yes, based on either VLAN ID or 802.1p priority, packets are passed onto the connecting VoIP phone using LLDP-MED			
Auto-Video VLAN			Yes	
GARP with GVRP			Yes	
Private VLAN			Yes	
L2 Services - Availability				
Broadcast, multicast, unknown unicast storm control			Yes	
IEEE 802.3ad - LAGs (LACP)			Yes	
IEEE 802.3x (full duplex and flow control)			Yes	
IEEE 802.1D Spanning Tree Protocol			Yes	
IEEE 802.1w Rapid Spanning Tree Protocol			Yes	
IEEE 802.1s Multiple Spanning Tree Protocol			Yes	
Layer 2 DHCP Relay			Yes	
Layer 2 DHCP Relay			Yes	
L2 Services - Multicast Filtering				
IGMP snooping (v1, v2 and v3)			Yes	
MLD snooping support (v1 and v2)			Yes	
IGMP snooping querier (v2)			Yes	
MLD snooping querier (v1)			Yes	
Multicast VLAN Registration (MVR)			Yes	
L3 Services - DHCP				
DHCP client			Yes	
DHCP snooping			Yes	

Gigabit PoE+ Smart Switches with Remote/Cloud Management

L3 Services - Routing	GS728TPv3	GS728TPv3	GS752TPv3	GS752TPv3
IPv4 static routing			32	
IPv6 static routing			32	
VLAN routing			Yes	
Host ARP table (number of entries)			512 ARP	
ICMP Router Discovery Protocol (IRDP)			Yes	
Number of IP VLAN interfaces (routed VLANs)			15	
Link Aggregation				
IEEE 802.3ad - LAGs (LACP)			Yes	
Manual LAG			Yes	
# of LAGs / # of members in each LAG		16 LAGs with max 8 members in each LAG		
Network Monitoring and Discovery Services				
802.1ab LLDP			Yes	
SNMP			v1, v2, v3	
RMON group 1,2,3,9			Yes	
Network Security				
IEEE 802.1x			Yes	
Guest VLAN			Yes	
RADIUS-based VLAN assignment via .1x			Yes	
MAC-based .1x			Yes	
RADIUS accounting			Yes	
Access Control Lists (ACLs)			L2 / L3 / L4	
IP-based ACLs (IPv4 and IPv6)			Yes	
MAC-based ACLs			Yes	
TCP/UDP-based ACLs			Yes	
MAC lockdown			Yes	
MAC lockdown by the number of MACs			Yes	
Control MAC # Dynamic learned entries			16384	
Control MAC # static entries			256	
IEEE 802.1x RADIUS port access authentication			Yes	
Port-based security by locked MAC addresses			Yes	
Dynamic ARP inspection			Yes	
Broadcast, unicast, multicast DoS protection			Yes	
DoS attacks prevention			Yes	
Network storm protection, DoS			Yes	
Broadcast, unicast, multicast DoS protection			Yes	
DoS attacks prevention			Yes	

Gigabit PoE+ Smart Switches with Remote/Cloud Management

Quality of Service (QoS)	GS728TPv3	GS728TPv3	GS752TPv3	GS752TPv3
Port-based rate limiting		Yes ingress and egress		
Port-based QoS		Yes		
Support for IPv6 fields		Yes		
DiffServ QoS		Yes ingress		
IEEE 802.1p COS		Yes		
Destination MAC and IP		Yes		
IPv4 and v6 DSCP		Yes		
IPv4 and IPv6 ToS		Yes		
TCP/UDP-based		Yes		
Weighted Round Robin (WRR)		Yes		
Strict priority queue technology		Yes		
Auto-VoIP VLAN / Auto-Voice VLAN	Yes, based on OUI bytes (default database and user-based OUIs) in the phone source MAC address			
Auto-VoIP	Yes, based on protocols (SIP). Prioritizes traffic to a higher queue			
Voice VLAN	Yes, based on either VLAN ID or 802.1p priority, packets are passed onto the connecting VoIP phone using LLDP-MED			
Auto-Video VLAN		Yes		
IEEE Network Protocols				
<ul style="list-style-type: none"> • IEEE 802.3 Ethernet • IEEE 802.3u 100BASE-T • IEEE 802.3ab 1000BASE-T • IEEE 802.3af PoE • IEEE 802.3at PoE+ • IEEE 802.3az Energy Efficient Ethernet (EEE) • IEEE 802.3ad Trunking (LACP) • IEEE 802.3z Gigabit Ethernet 1000BASE-SX/LX 	<ul style="list-style-type: none"> IEEE 802.3x Full-Duplex Flow Control • IEEE 802.1Q VLAN Tagging • IEEE 802.1AB LLDP with ANSI/TIA-1057 (LLDP-MED) • IEEE 802.1p Class of Service • IEEE 802.1D Spanning Tree (STP) • IEEE 802.1s Multiple Spanning Tree (MSTP) • IEEE 802.1w Rapid Spanning Tree (RSTP) • IEEE 802.1x RADIUS Network Access Control 			
Management, Monitoring & Troubleshooting				
Cloud/Remote management		Yes		
Insight mobile app & Insight Cloud Portal management		Yes		
uPnP Discovery		Yes		
Lite Command-line Interface (CLI)	Yes (Refer to Lite CLI Manual on NETGEAR Support page of the switch model)			
Networking monitoring		Yes		
Data/performance logs		Yes		
Centralized network configuration/policies (network-centric management)		Yes		
Device auto-join and configure (zero-touch provisioning)		Yes		
Multi-site, multi-network single pane-of-glass view		Yes		
Multi-switch, multi-port concurrent configuration		Yes		
Network/global password (for all Insight Managed devices on a network)	Yes (per network/subnet via NETGEAR Insight mobile app and Insight Cloud portal)			

Gigabit PoE+ Smart Switches with Remote/Cloud Management

Management, Monitoring & Troubleshooting	GS728TPv3	GS728TPPv3	GS752TPv3	GS752TPPv3
Password management			Yes	
Configurable management VLAN			Yes	
Admin access control via RADIUS and TACACS+			Yes	
IPv6 management			Yes	
SNTP client over UDP port 123			Yes	
SNMP v1/v2c			Yes	
SNMP v3 with multiple IP addresses			Yes	
RMON group 1,2,3,9			Yes	
Port mirroring			Yes ingress and egress	
Many-to-one port mirroring	28	28	52	52
Web browser-based graphical user interface (GUI)			Yes	
Dual software (firmware) image			Yes	
Cable test utility			Yes	
TLS/HTTPS Web-based access (version)			Yes (v1.2 and v1.3)	
File transfers (uploads, downloads)			TFTP / HTTP	
HTTP upload/download (firmware)			Yes	
Syslog (RFC 3164)			Yes	
USB port for firmware and config upload/download			Yes	
LEDs				
Per port		Speed, Link, Activity; or PoE in different mode		
Per device		Power, Fan, PoE Max		
Physical Specifications				
Dimensions	440x257x43.2 mm (17.3 x 10.1 x 1.7 in)	440x257x43.2 mm (17.3 x 10.1 x 1.7 in)	440x310x43.2 mm (17.3 x 12.2 x 1.7 in)	440x310x43.2 mm (17.3 x 12.2 x 1.7 in)
Weight	3.78 kg (8.32 lb)	4.11 kg (9.05 lb)	4.93 kg (10.86 lb)	5.03 kg (11.08 lb)
Power Consumption (when all ports used, line-rate traffic and max PoE)				
Max power (worst case, all ports used, full PoE, line-rate traffic) (Watts)	226W	427W	431W	861W
Max power without PoE (worst case, all ports used, line-rate traffic) (Watts)	24W	26W	45W	49W
Idle power consumption (all ports link-down standby) (Watts)	13W	14W	23W	29W
Heat Dissipation (worst case, all ports used, full PoE, line-rate traffic) (BTU/hr)	772.9 BTU/hr	1,460.34 BTU/hr	1,474.02 BTU/hr	2,944.6 BTU/hr
Energy Efficient Ethernet (EEE) IEEE 802.3az		Yes (deactivated by default)		
Fan	2	2	2	3

Gigabit PoE+ Smart Switches with Remote/Cloud Management

Environmental Specifications	GS728TPv3	GS728TPv3	GS752TPv3	GS752TPv3
Operating				
Operating Temperature	0° to 50°C (32° to 122°F)			
Humidity	90% maximum relative humidity (RH), non-condensing			
Altitude	10,000 ft (3,000 m) maximum			
Storage				
Storage Temperature	-20° to 70°C (-4° to 158°F)			
Humidity (relative)	95% maximum relative humidity, non-condensing			
Altitude	10,000 ft (3,000 m) maximum			
Electromagnetic Emissions and Immunity				
Certifications	CE, FCC Class A, RCM, ICES Class A, VCCI, KC, BSMI, UKCA			
Safety				
Certifications	CB, CE, CSA, RCM, KC, BSMI			
Warranty and Support				
Hardware Limited Warranty	Limited Lifetime*			
Technical Support via Phone and Email*	90 days			
Limited Lifetime* 24x7 Online Chat Technical Support	Limited Lifetime*			
Limited Lifetime* Next-Business-Day (NBD) Replacement	Limited Lifetime*			
ProSUPPORT OnCall 24x7 Service Packs**	Category 1:	Category 1:	Category 2:	Category 2:
OnCall 24x7 extends the 90-day phone and email warranty entitled technical support for standard and advanced features to the length of the contract term.	PMB0311 (1 yr) PMB0331 (3 yrs) PMB0351 (5 yrs)	PMB0311 (1 yr) PMB0331 (3 yrs) PMB0351 (5 yrs)	PMB0312 (1 yr) PMB0332 (3 yrs) PMB0352 (5 yrs)	PMB0312 (1 yr) PMB0332 (3 yrs) PMB0352 (5 yrs)
Package Contents				
All models	Smart Switch AC Power cord with C13 connector (localized to region of sale) Brackets and screws for rack mounting Rubber footpads for tabletop installation Rubber protection caps, which are already installed in the SFP sockets Installation guide			

Ordering Information

GS728TP

GS728TP-300AUS	Australia
GS728TP-300EUS	Europe, including United Kingdom
GS728TP-300INS	India
GS728TP-300JPS	Japan
GS728TP-300KOS	South Korea
GS728TP-300NAS	North America, Latin America
GS728TP-300PES	Middle East
GS728TP-300PRS	China
GS728TP-300TWS	Taiwan
GS728TP-300UKS	Hong Kong

GS728TPP

GS728TPP-300AUS	Australia
GS728TPP-300EUS	Europe, including United Kingdom
GS728TPP-300INS	India
GS728TPP-300JPS	Japan
GS728TPP-300KOS	South Korea
GS728TPP-300NAS	North America, Latin America
GS728TPP-300PES	Middle East
GS728TPP-300PRS	China
GS728TPP-300TWS	Taiwan
GS728TPP-300UKS	Hong Kong

GS752TP

GS752TP-300AUS	Australia
GS752TP-300EUS	Europe, including United Kingdom
GS752TP-300INS	India
GS752TP-300JPS	Japan
GS752TP-300KOS	South Korea
GS752TP-300NAS	North America, Latin America
GS752TP-300PES	Middle East
GS752TP-300PRS	China
GS752TP-300TWS	Taiwan
GS752TP-300UKS	Hong Kong

GS752TPP

GS752TPP-300AUS	Australia
GS752TPP-300EUS	Europe, including United Kingdom
GS752TPP-300INS	India
GS752TPP-300JPS	Japan
GS752TPP-300KOS	South Korea
GS752TPP-300NAS	North America, Latin America
GS752TPP-300PES	Middle East
GS752TPP-300PRS	China
GS752TPP-300TWS	Taiwan
GS752TPP-300UKS	Hong Kong

Optional Modules, Software Licenses and Accessories

AGM731F	SFP Transceiver 1000BASE-SX (Short range, multimode)
AGM732F	SFP Transceiver 1000BASE-LX (Long range, single mode)
AGM734-10000S	SFP Transceiver 1000BASE-T Copper RJ45 GBIC

*This product comes with a limited warranty that is valid only if purchased from a NETGEAR authorized reseller, and covers unmodified hardware, fans and internal power supplies - not software or external power supplies, and requires product registration at <https://www.netgear.com/business/registration> within 90 days of purchase; see <https://www.netgear.com/about/warranty> for details. Intended for indoor use only.

** The NETGEAR OnCall 24x7 contract provides unlimited phone and email technical support for your networking product. For ProSAFE products purchased prior to 06/2014, also includes next-business-day hardware replacement.

† NETGEAR #1 in US Market Share according to NPD data for Unmanaged and Smart Switches, September 2019. NETGEAR #1 in Europe Market Share according to Context data for Unmanaged and Smart Switches, September 2019.

NETGEAR and the NETGEAR Logo are trademarks of NETGEAR, Inc. in the United States and/or other countries. Other brand names mentioned herein are for identification purposes only and may be trademarks of their respective holder(s). Information is subject to change without notice.

NETGEAR, Inc. 350 E. Plumeria Drive, San Jose, CA 95134-1911 USA, 1-888-NETGEAR (638-4327), E-mail: info@NETGEAR.com, www.NETGEAR.com

DS- GS728TP/GS728TPP/GS752TP/GS752TPP-4May23