

Twoja Infrastruktura IT

netf.pl

NETF, specjalizujemy się w sprzedaży zaawansowanej infrastruktury IT. Znajdą tu Państwo szeroki asortyment produktów od czołowych światowych producentów sprzętu i oprogramowania IT, w tym H3C, Huawei, Cisco, Juniper, Fortinet, a także Dell, IBM, CommVault i ESET. Dzięki współpracy z tymi renomowanymi partnerami, NETF zapewnia swoim klientom dostęp do najnowocześniejszych rozwiązań technologicznych.

**Bezpieczeństwo,
Efektywność,
Optymalizacja**





UniFi® | SWITCH 8

Fully Managed Gigabit Switches

Models: US-8, US-8-60W

Non-Blocking Throughput Switching Performance

Gigabit Ethernet RJ45 Ports

Robust Performance for Enterprise Networks



UniFi® | SWITCH

Overview

Build and expand your network with Ubiquiti Networks® UniFi® Switch, part of the UniFi line of products.

The new 8-port models feature Gigabit Ethernet ports in a compact form factor. The switches are fully manageable, delivering robust performance and intelligent switching for your networks.

Switching Performance

The UniFi Switch offers the forwarding capacity to simultaneously process traffic on all ports at line rate without any packet loss.


For its total, non-blocking throughput, each UniFi Switch supports up to 8 Gbps with a switching capacity of 16 Gbps.

PoE


The US-8 can be powered by 802.3af/at PoE, 48V passive PoE, or the included power adapter*. 48V passive PoE passthrough is supported on port 8.

Port 8 can deliver up to 12W of power when powered by 802.3at PoE+, 48V passive PoE, or the included power adapter*. (If the power source is 802.3af PoE, then the PoE output budget will be less than 12W.)

The US-8-60W is powered by its included power adapter. It has four auto-sensing PoE ports delivering up to 15.4W of power per port.

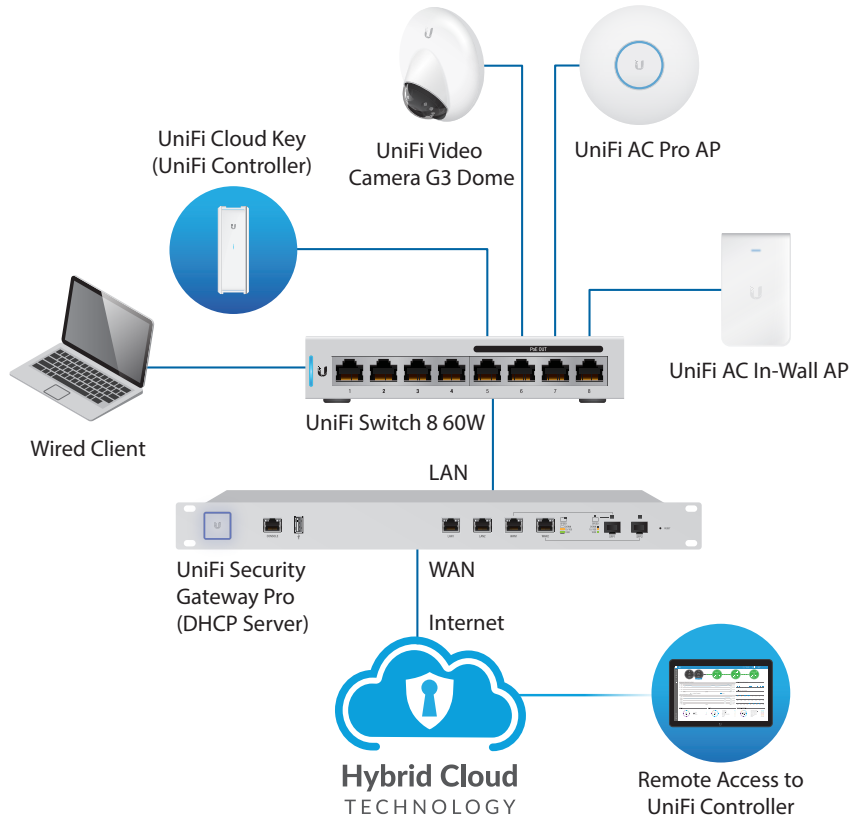

US-8-60W Sample Network Diagram

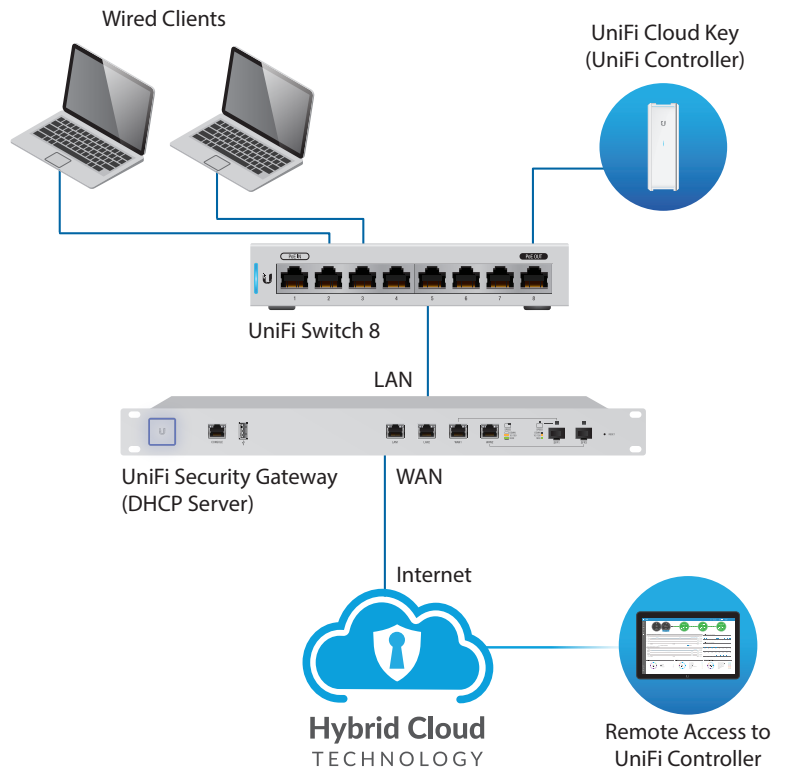

US-8 Sample Network Diagram


* Included only in single-packs of the US-8.

Models

UniFi® | SWITCH 8

Model: US-8



- (8) Gigabit RJ45 Ports
- (1) PoE Passthrough Port
- Non-Blocking Throughput: 8 Gbps
- Switching Capacity: 16 Gbps
- Forwarding Rate: 11.9 Mpps
- Maximum Power Consumption: 12W
- PoE or DC Input Option
- Available in Single-Pack and 5-Pack
(Power Supply Not Included with 5-Pack)

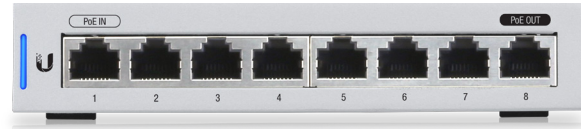

UniFi® | SWITCH 8 60W

Model: US-8-60W


- (8) Gigabit RJ45 Ports
- (4) Auto-Sensing IEEE 802.3af PoE Ports
- Non-Blocking Throughput: 8 Gbps
- Switching Capacity: 16 Gbps
- Forwarding Rate: 11.9 Mpps
- Maximum Power Consumption: 12W
- Available in Single-Pack and 5-Pack

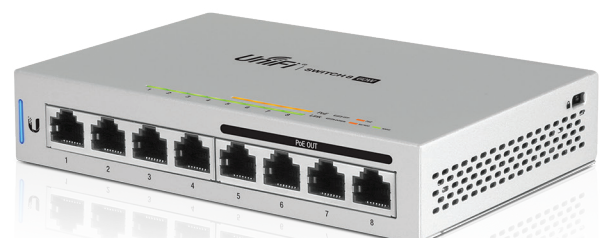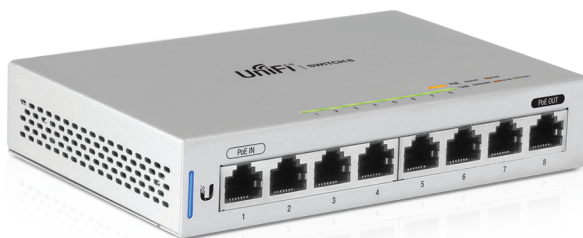

Mounting Versatility

The UniFi Switch offers the following mounting options:

- **Wall Mounting** You can attach the UniFi Switch to a vertical surface using the included wall-mounting hardware. You can position the switch so that the ports face in any of four directions: up, down, left, or right.

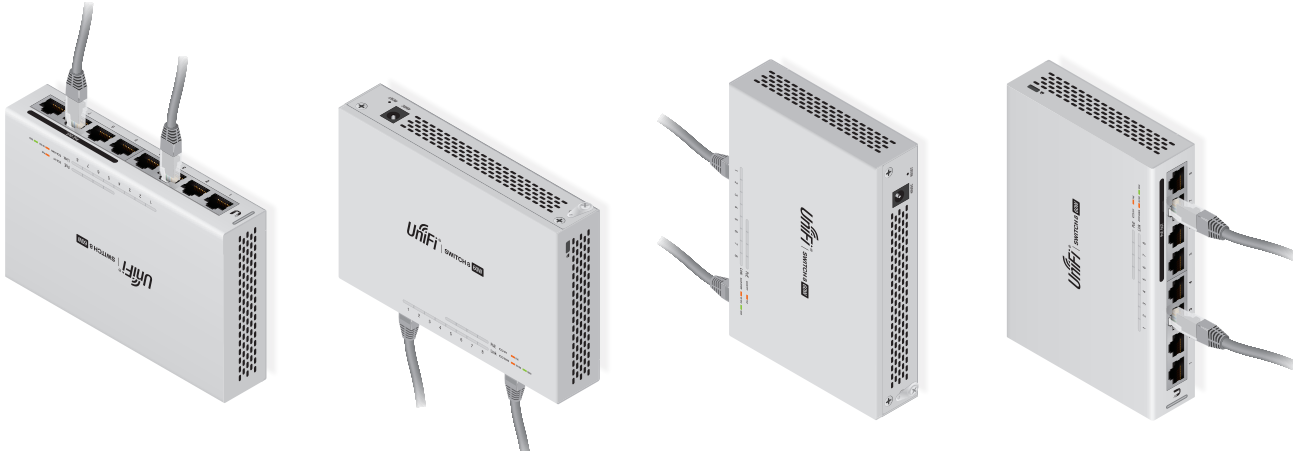


- **Desktop Placement** You can place the UniFi Switch on a level, horizontal surface such as a table or desktop. The built-in, non-skid rubber feet help hold the switch firmly in place.



Security Slot

To help deter theft, you can attach a lock to the security slot on the side of the UniFi Switch.

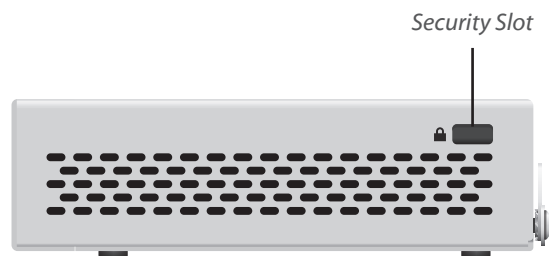


Specifications

US-8	
Dimensions	148.0 x 99.5 x 30.7 mm (5.83 x 3.92 x 1.21")
Weight	432 g (15.24 oz)
Enclosure Characteristics	SGCC Steel
Total Non-Blocking Throughput	8 Gbps
Switching Capacity	16 Gbps
Forwarding Rate	11.9 Mpps
Max. Power Consumption	12W (Excluding PoE Output)
Max. Passive PoE Wattage per Port	PoE Mode 1: 12W @ 802.3at PoE Mode 2: 12W @ 48V DC Input Mode: 12W @ 48V
Passive PoE Voltage Range	Depends on Power Source
Power Method	(1) DC 48V, Max. 1.25A (1) PoE Input, 802.3 af/at (Pins +1, 2; -3, 6)
Supported Voltage Range	DC: 48V; 48V Mode: 56V to 40V
Power Supply	External AC/DC Adapter ¹ : 100-240VAC, 50/60 Hz; 48VDC, 0.5A
LEDs	PoE (Port 8), Speed/Link/Activity (All Ports)
Sound Level ²	0.7 dBr (Fanless)
Networking Interfaces	(8) 10/100/1000 Mbps RJ45 Ports
PoE In Interface (Port 1)	PoE Mode 1: 802.3af/at (Pins +1, 2; -3, 6) PoE Mode 2: 48V (Pins +4, 5; -7, 8)
PoE Out Interface (Port 8)	PoE Mode 1: 48V (Pins +1, 2; -3, 6) PoE Mode 2: Passive 48V (Pins +4, 5; -7, 8) DC Input Mode: DC Passthrough (Pins +1, 2; -3, 6)
Management Interface	Ethernet In-Band Management
ESD/EMP Protection	Air: ± 24 kV, Contact: ± 24 kV
Operating Temperature	-5 to 45° C (23 to 113° F)
Operating Humidity	5 to 95% Noncondensing
Shock and Vibration	ETSI300-019-1.4 Standard
Certifications	CE, FCC, IC

¹ Included only in single-packs of the US-8.


² Background noise level: 27.5 dBA

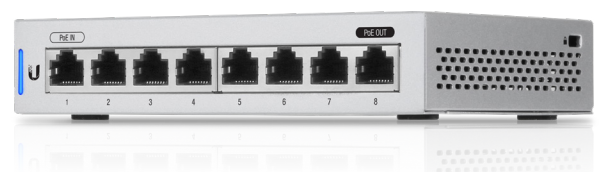

Specifications





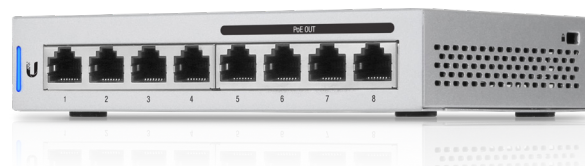

US-8-60W	
Dimensions	148.0 x 99.5 x 30.7 mm (5.83 x 3.92 x 1.21")
Weight	432 g (15.24 oz)
Enclosure Characteristics	SGCC Steel
Total Non-Blocking Throughput	8 Gbps
Switching Capacity	16 Gbps
Forwarding Rate	11.9 Mpps
Max. Power Consumption	12W (Excluding PoE Output)
Max. PoE Wattage per Port	15.4W
Power Method	48VDC, Max. 2A
Supported Voltage Range	57VDC to 44VDC
Power Supply	External AC/DC Adapter: 100-240VAC, 50/60 Hz; 48VDC, 1.25A
LEDs	PoE (Port 8), Speed/Link/Activity (All Ports)
Sound Level*	0.6 dBr (Fanless)
Networking Interfaces	(8) 10/100/1000 Mbps RJ45 Ports
PoE Interfaces	(4) Ports 5, 6, 7, 8; IEEE802.3af
ESD/EMP Protection	Air: ± 24 kV, Contact: ± 24 kV
Operating Temperature	-5 to 45° C (23 to 113° F)
Operating Humidity	5 to 95% Noncondensing
Shock and Vibration	ETSI300-019-1.4 Standard
Certifications	CE, FCC, IC

* Background noise level: 27.5 dBA



UniFi AP and Video Camera Compatibility

The UniFi Switch is compatible with UniFi Access Points and UniFi G3 Video Cameras, as detailed below.

AP/Camera Model	US-8	US-8-60W	US-8-150W	US-16-150W	US-24-250W	US-24-500W	US-48-500W	US-48-750W
UVC-G3			✓	✓	✓	✓	✓	✓
UVC-G3-AF	✓	✓	✓	✓	✓	✓	✓	✓
UVC-G3-DOME	✓	✓	✓	✓	✓	✓	✓	✓
UAP			✓	✓	✓	✓	✓	✓
UAP-LR			✓	✓	✓	✓	✓	✓
UAP-PRO	✓	✓	✓	✓	✓	✓	✓	✓
UAP-AC-LITE ¹	✓	✓	✓	✓	✓	✓	✓	✓
UAP-AC-LR ¹	✓	✓	✓	✓	✓	✓	✓	✓
UAP-AC-PRO	✓	✓	✓	✓	✓	✓	✓	✓
UAP-AC-M	✓	✓	✓	✓	✓	✓	✓	✓
UAP-AC-M-PRO	✓	✓	✓	✓	✓	✓	✓	✓
UAP-AC-IW ²	✓	✓	✓	✓	✓	✓	✓	✓
UAP-AC-IW-PRO ²	✓	✓	✓	✓	✓	✓	✓	✓
UAP-AC-HD	-	-	✓	✓	✓	✓	✓	✓

✓ Compatible with the UniFi switch

 Requires Instant 802.3af Gigabit PoE Converter: INS-3AF-I-G  or INS-3AF-O-G 

Notes:

1. UAP-AC-LITE and UAP-AC-LR models manufactured before September 2016 require the Instant 802.3af Gigabit PoE Converter.

2. For the UAP-AC-IW and UAP-AC-IW-PRO, PoE passthrough is supported by all of the switches listed above except for models US-8 and US-8-60W.

Related Product Datasheets



UniFi PoE Switches:

[dl.ubnt.com/datasheets/unifi/UniFi PoE Switch.pdf](https://dl.ubnt.com/datasheets/unifi/UniFi_PoE_Switch.pdf)



UniFi AC APs:

[dl.ubnt.com/datasheets/unifi/UniFi AC APs DS.pdf](https://dl.ubnt.com/datasheets/unifi/UniFi_AC_APs_DS.pdf)



UniFi G3 Video Cameras:

[dl.ubnt.com/datasheets/unifi/UniFi Video G3 DS.pdf](https://dl.ubnt.com/datasheets/unifi/UniFi_Video_G3_DS.pdf)

Specifications are subject to change. Ubiquiti products are sold with a limited warranty described at: www.ui.com/support/warranty
The limited warranty requires the use of arbitration to resolve disputes on an individual basis, and, where applicable, specify arbitration instead of jury trials or class actions.

©2016-2020 Ubiquiti Inc. All rights reserved. Ubiquiti, Ubiquiti Networks, the Ubiquiti U logo, the Ubiquiti beam logo, and UniFi are trademarks or registered trademarks of Ubiquiti Inc. in the United States and in other countries. All other trademarks are the property of their respective owners.